

# Most Trusted Traveling Irrigation Systems Since 1964

## **Reel-Mounted Booster Pumps**



- Kifco's Electric and Engine Driven Booster Pumps provide additional pressure to your Water-Reels, when needed, to maximize performance.
- Kifco's standard engine driven booster pumps feature heavy-duty Franklin Electric centrifugal pumps close coupled to Honda, Kohler or Briggs & Stratton engines for a compact, high performing unit.
- Engine Driven Booster Pumps are equipped with electronic ignition, low flow shut-off, high temp blow off valve, fuel filter, air filters, muffler, choke and throttle to protect your investment and allow for safe operation.
- Low Oil Safety Shutdown on Honda Engines
- Fuel Cell with filters for minimum 10 hour run time
- Optional High Altitude Jets
- Flow Switch for Automatic Booster Pump Shutdown when Water-Reel shuts down on Engine Driven B-Series Boosters; Low Pressure Shutdown on Ag-Rain Boosters


Booster Pump Model	Applicable Water-Reel Model
KFACGFH-G5.5	B140, E140, T180, E180, T200S, E200S, T200L, E200L, T210, E210, E200SST
KFACGFH-G9	B140, E140, T180, E180, T200S, E200S, T200L, E200L, T210, E210, E200SST, T25x750, E25x750, T27x980, E27x980, T30x660, E30x660
KFNG2.5B-G23	T27x980, E27x980, T30x660, E30x660, T30x980, E30x980, T30x1200, E30x1200, T33x1120, E33x1120
KFACGFK-G23	T27x980, E27x980, T30x660, E30x660, T30x980, E30x980, T30x1200, E30x1200, T33x1120, E33x1120
KD2.5AGE-G37	T37x1220, E37x1220, T40x1250, E40x1250

#### www.kifco.com



700 S. Schrader Ave. P.O. Box 290 Havana, IL 62644 800-452-7017 Toll Free 309-543-4425 Phone 309-543-4945 Fax

### **Performance Chart**

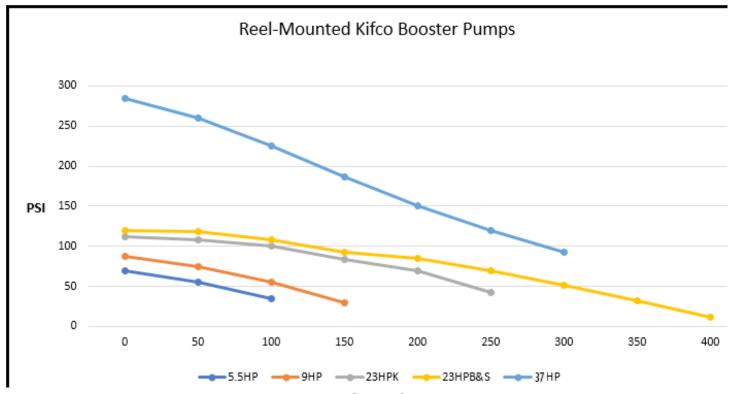

## **Technical Specifications**

KFACGFH-G5.5		
Pump Model	Franklin Electric ACGF-5	
Engine Model	Honda Gx160	
Discharge	2" FNPT	
Suction	2" FNPT	
Fuel Cell Size	6 Gallon	
Hours of Runtime	15	
Flow Range	0 - 100 gpm	
*Mounting Kit (Reel Mounted)	B3, T4, or T5 Kits	

KFNG2.5B-G23		
Pump Model	Franklin Electric NG-2 1/2	
Engine Model	Briggs & Stratton Vanguard	
Discharge	3" FNPT	
Suction	2.5" FNPT	
Fuel Cell Size	50 Gallon	
Hours of Runtime	33	
Flow Range	0 - 400 gpm	
*Mounting Kit (Reel Mounted)	ST3, ST4 or ST5 Kits	

The performance information contained herein is based on ideal conditions. Actual performance is affected by, but not limited to, location, operating conditions (temperature, humidity & altitude) and human judgment.
Kifco Inc. reserves the right to change product specifications, designs, pricing and standard equipment without notice and without incurring obligation

KFACGFH-G9		
Pump Model	Franklin Electric ACGF-8	
Engine Model	Honda Gx270	
Discharge	2" FNPT	
Suction	2" FNPT	
Fuel Cell Size	6 Gal (B-Series) 12 Gal (Ag-Rain)	
Hours of Runtime	10 (B-Series) 20 (Ag-Rain)	
Flow Range	0 - 150 gpm	
*Mounting Kit (Reel Mounted)	B3, T4, T5, ST2 or ST3 Kits	

KFACGFK-G23		
Pump Model	Franklin Electric ACGF-18	
Engine Model	Kohler CH7360	
Discharge	3" FNPT	
Suction	2.5" FNPT	
Fuel Cell Size	50 Gallon	
Hours of Runtime	33	
Flow Range	0 - 400 gpm	
*Mounting Kit (Reel Mounted)	ST3, ST4 or ST5 Kits	

KD2.5AGE-G37	
Pump Model	Darley 2-1/2 AGE
Engine Model	Briggs & Stratton Vanguard
Discharge	One 2-1/2" & Two 1-1/2" Female NPT
Suction	2.5" NPT
Fuel Cell Size	50 Gallons
Hours of Runtime	20 Hours
Flow Range	0 - 300
*Mounting Kit (Reel Mounted)	ST6 Kits



<sup>\*</sup>Mounting Kits Sold Separately